



Beading machine


ZSM 2.5 • ZSH 2.5 • ZSM 4.0 • ZSH 4.0

Machine for workshop and construction site




Standard configuration (2.5)

- ✓ Foot pedal
- ✓ Standard rollers
- ✓ Baseframe
- ✓ Reductor
- ✓ Operation manual

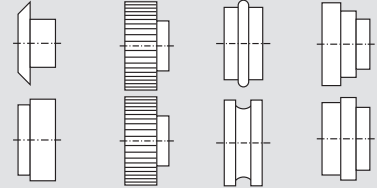


Optional configuration (2.5)

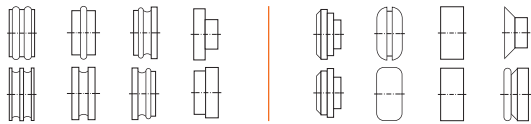


- Motorized roller drive
- Upper roll feeding - mechanical driven (ZSM)
- Upper roll feeding - hydraulic driven (ZSH)



Standard configuration (4.0)

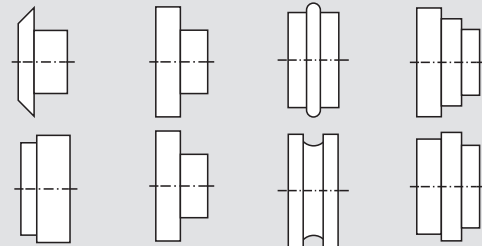

Optional configuration (4.0)

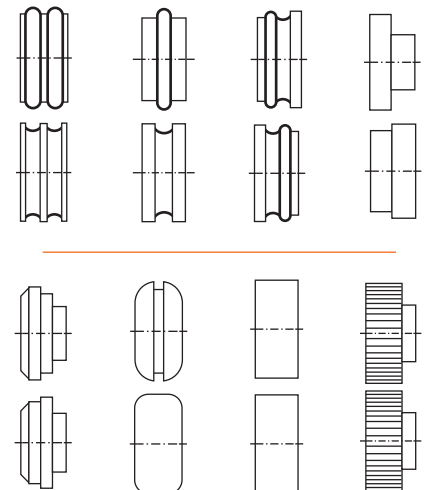

Specifications	ZSM/ZSH 2.5		ZSM/ZSH 4.0	
		13 Ga		9 Ga
Max. material thickness	mm	2.5 (.1")		4.0 (0.15")
Rolls opening	mm	96 (3.75")		126 (5")
Throat	mm	160 (6.3")		200 (7.8")
Beading speed	rpm	16		12
Main drive motor	kW	1.5 (2 Hp)		2.2 (3 Hp)
Hydraulic motor	kW	-/0.75 (-/1 Hp)		-/0.75 (-/1 Hp)
Dimensions (L/W/H)	mm	1400x550x1120 (56x22x44")		1700x570x1200 (67x23x48")
Weight	kg	380 (830 lbs)		500 (1,100 lbs)
Item No. (ZSM)		9901011		9901012
Item No. (ZSH)		9902001		9902002

*The above specifications are subject to change without prior notice. No liability for printing mistakes. Machine may be shown with optional equipment.